




PENTALIFT EQUIPMENT CORPORATION

## (A) EXTERIOR GRADE LEVEL RECESSED PIT INSTALLATION

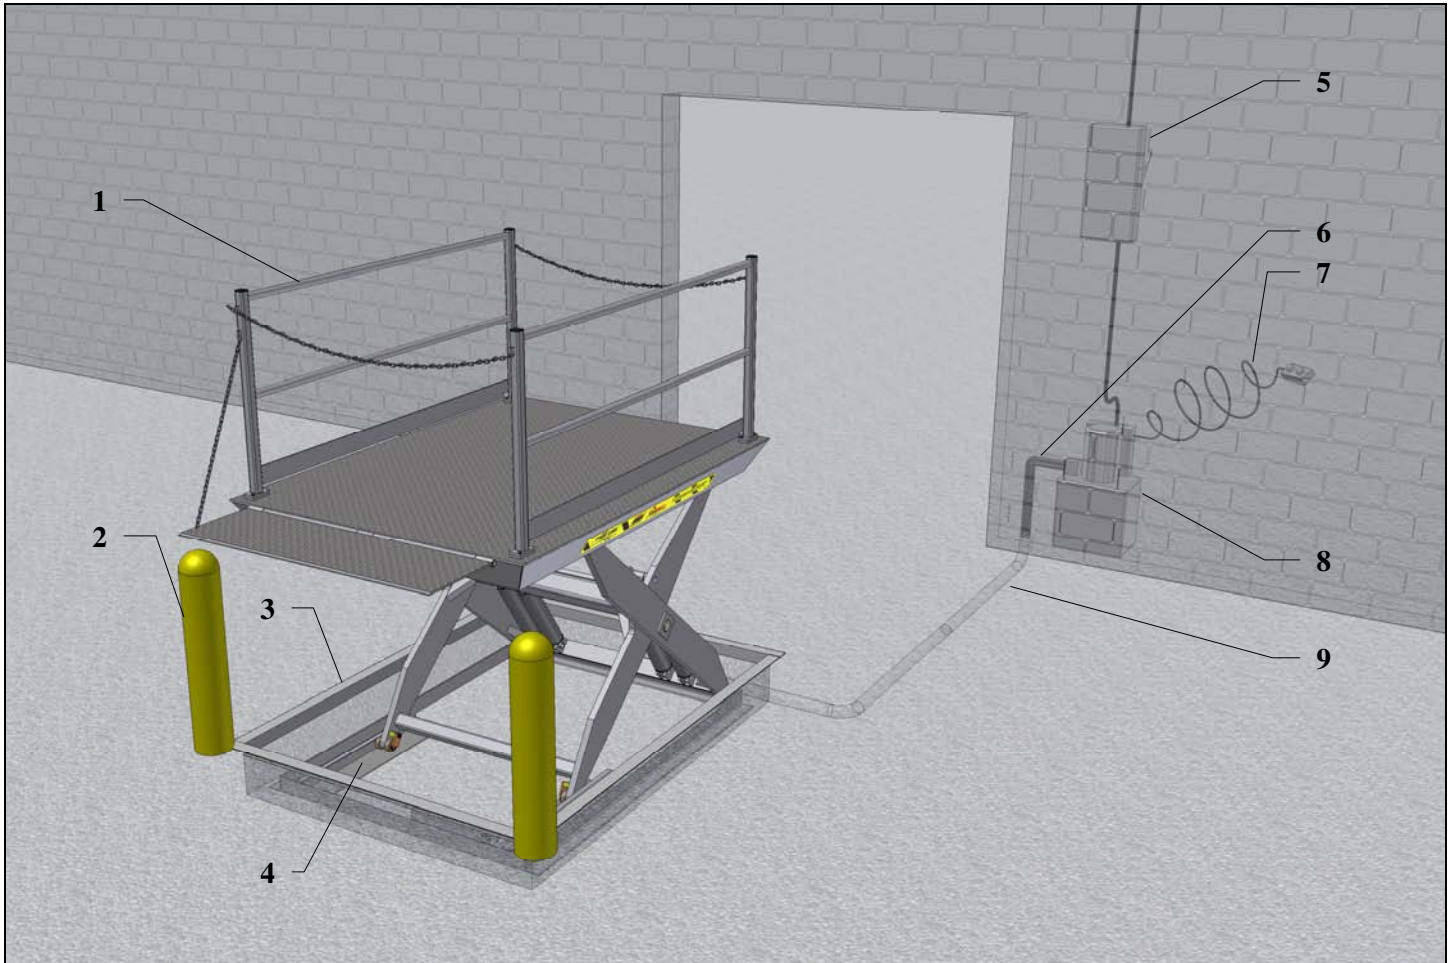

1. Removable Guard Rails with Access Chains
2. Bollards: Note: Lip should project 12" beyond face of Bollards
3. Curb Angle, recommended Curb Angle Size is 3" x 3" x 1/4" Angle
4. Pre-Drilled Frame for Lagging Unit into position
5. Electrical Disconnect Box
6. Hydraulic Hoses
7. Push Button Control on 10 ft of Power Cord
8. Remote Power Unit
9. Conduit(s) from Pit to Power Unit

# NOTICE

The above is a generic application depiction drawing with generic bills of materials. Not for construction or building purposes. Not all of the components listed are included or provided by the factory. Consult factory for specific job drawings and component requirements.

### PENTALIFT EQUIPMENT CORPORATION

PO Box 1510 Buffalo NY U.S.A. 14240-1510  
PO Box 1060 Guelph ON Canada N1H 6N1  
CP 1219 Pointe-Claire QC Canada H9S 5K7  
Website: [www.pentalift.com](http://www.pentalift.com)

Phone: (519) 763-3625 Fax: (519) 763-2894  
Phone: (519) 763-3625 Fax: (519) 763-2894  
Phone: (514) 426-0219 Fax: (519) 763-2894  
Email: [dock@pentalift.com](mailto:dock@pentalift.com)