




PENTALIFT EQUIPMENT CORPORATION

(C) EXTERIOR GRADE LEVEL TO DOCK LEVEL RECESSED PIT INSTALLATION (FRONT MOUNT)

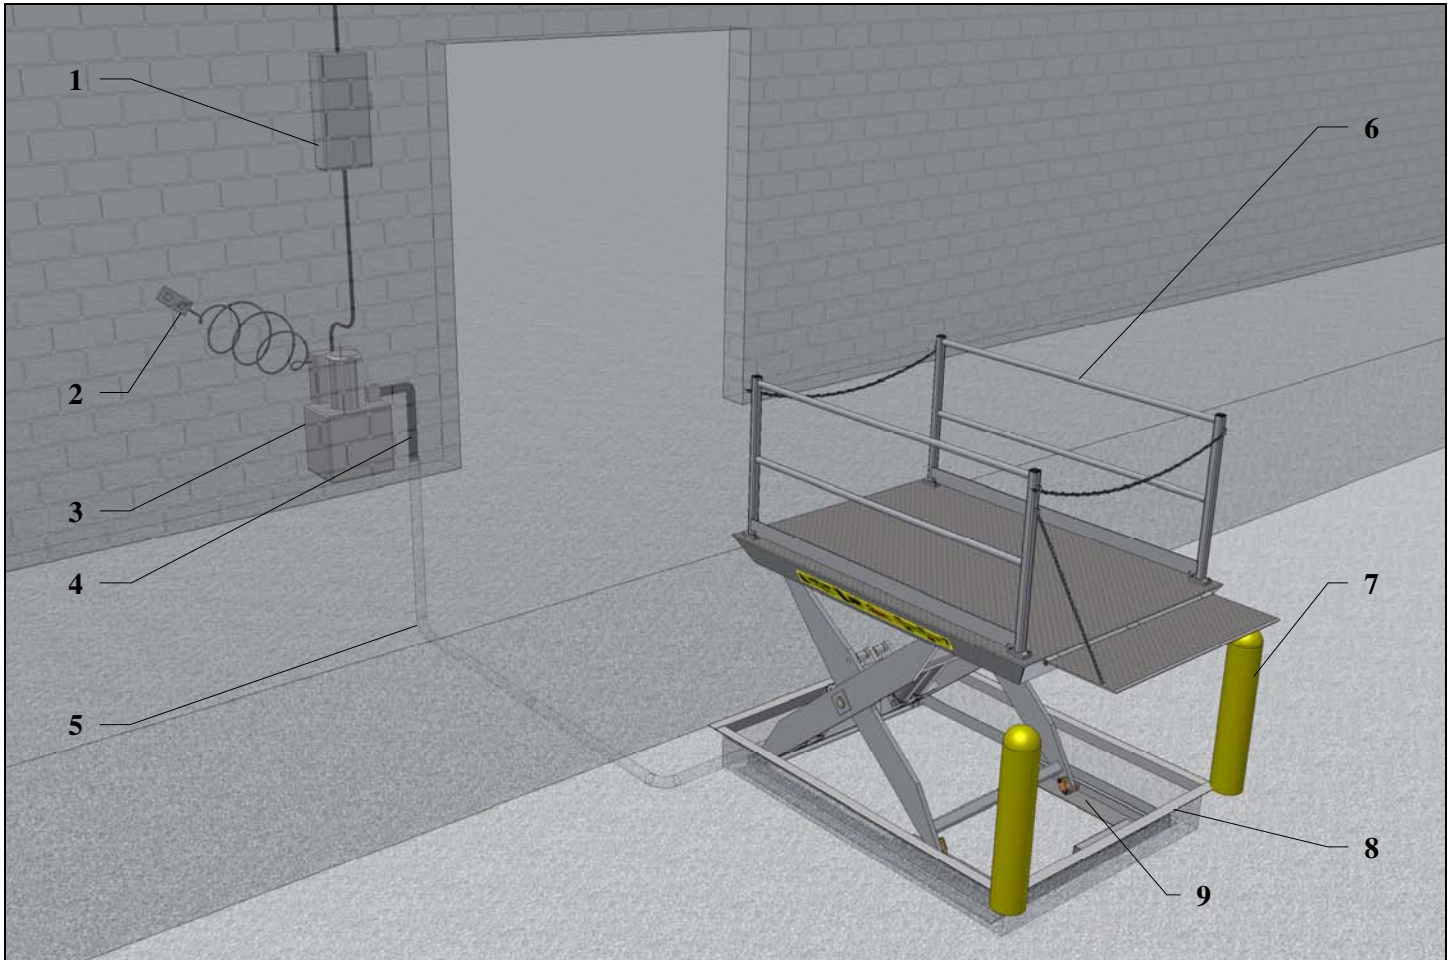

1. Electrical Disconnect Box
2. Push Button Control on 10 ft of Power Cord
3. Remote Power Unit
4. Hydraulic Hoses
5. Conduit(s) from Pit to Power Unit
6. Removable Guard Rails with Access Chains
7. Bollards: Note: Lip should project 12" beyond face of Bollards
8. Curb Angle, recommended Curb Angle Size is 3" x 3" x 1/4" Angle
9. Pre-Drilled Frame for Lagging Unit into position

NOTICE

The above is a generic application depiction drawing with generic bills of materials. Not for construction or building purposes. Not all of the components listed are included or provided by the factory. Consult factory for specific job drawings and component requirements.

PENTALIFT EQUIPMENT CORPORATION

PO Box 1510 Buffalo NY U.S.A. 14240-1510
PO Box 1060 Guelph ON Canada N1H 6N1
CP 1219 Pointe-Claire QC Canada H9S 5K7
Website: www.pentalift.com

Phone: (519) 763-3625 Fax: (519) 763-2894
Phone: (519) 763-3625 Fax: (519) 763-2894
Phone: (514) 426-0219 Fax: (519) 763-2894
Email: dock@pentalift.com