




Engineered for Safety!

## Vertical Storing Dock Leveler HDV Series

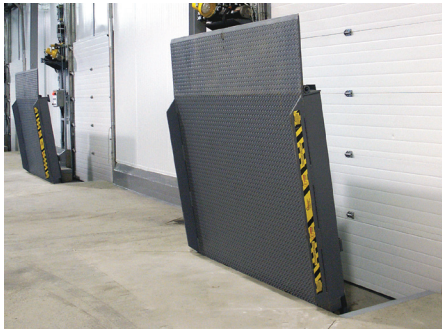

### Description:

The Pentalift HDV series vertical storing hydraulic dock leveler is designed and built for use in facilities where cleanliness and temperature conditions are maintained and controlled at a high level. Convenient push button activation and proven hydraulic technology increase the efficiency and safety of the loading/unloading process. The Pentalift HDV series vertical storing hydraulic dock leveler provides superior performance while allowing easy cleaning of the loading dock area. All Pentalift dock levelers are factory tested before shipping.

### Specifications:

Vertical Storing Hydraulic Dock Leveler(s) will be model HDV \_\_\_\_\_ as manufactured by Pentalift Equipment Corporation. The nominal deck size will be \_\_\_\_\_' wide x \_\_\_\_\_' long with a rated capacity of \_\_\_\_\_ lb. Deck stores vertically by leaning slightly backward without the need for a mechanical storage system. Dock Leveler(s) will be fully hydraulic with a wall mounted, push button control station. The power unit will be a 1 ½ Hp, remote, TENV unit installed on the wall with mounting brackets. The power supply will to be \_\_\_\_/\_\_\_\_/\_\_\_\_. All hydraulic functions will be controlled by the Pentalogic Hydraulic Manifold. The nominal lip length will be 16". The lip hinge will be a full width, piano style with a full width hinge pin. The lip hinge will be welded to a high tensile headboard. The rear hinge design will be a full width, fixed style. The deck design will accommodate canted trucks/ trailers up to 4". Dock Leveler(s) will be equipped with double acting lift cylinder, 4" high run-off guards, velocity fuse and a swing in place maintenance stand. A 10" high rear mounting channel will be provided for casting in concrete. Two molded rubber bumpers with mounting plates will be provided. Dock Leveler(s) will have Pentalift gray finish.

Model*	Width	Length
HDV65__	6.0'	5.0'
HDV66__	6.0'	6.0'
HDV68__	6.0'	8.0'
HDV6.55	6.5'	5.0'
HDV6.56__	6.5'	6.0'
HDV6.58__	6.5'	8.0'
HDV75	7.0'	5.0'
HDV76__	7.0'	6.0'
HDV78__	7.0'	8.0'

\*Models available in rated capacities (multiply by 1000 lb.) of 25, 30, 35, 40, 45, 50, 60.

### Vertical Storing Dock Leveler To Be Equipped With The Following Available Options (Specify):

- interlock to Pentalift vehicle restraint
- interlock to overhead door
- master control panel
- lip hinge grease fittings
- foam insulated deck
- 18" or 20" lip length
- rear mounting flat bar
- draft pad
- bumper risers

### Link to Website Information

For more information regarding this product refer to the Pentalift website product page: [www.pentalift.com/prodinfoVSDL.htm](http://www.pentalift.com/prodinfoVSDL.htm)

Consult a Pentalift Sales Representative for additional information or equipment recommendations

Note: Some photos may reflect products with optional features. All Pentalift Equipment products are subject to design improvement through modification without notice.

## PENTALIFT EQUIPMENT CORPORATION

P O Box 1510 Buffalo NY U.S.A. 14240-1510

P O Box 1060 Guelph ON Canada N1H 6N1

CP 1219 Pointe-Claire QC Canada H9S 5K7

Website: [www.pentalift.com](http://www.pentalift.com)

Phone (519) 763-3625 Fax (519) 763-2894

Phone (519) 763-3625 Fax (519) 763-2894

Phone (514) 426-0219 Fax (519) 763-2894

Email: [dock@pentalift.com](mailto:dock@pentalift.com)

Product Bulletin 0410S030

Printed in Canada