




Engineered for Safety

Pentalift EnergyMax EM Series Dock Leveler Weather Seal System

The Pentalift EnergyMax weather seal system is a system consisting of 3 weather seals installed on each of the two sides of the dock leveler. The weather seal system eliminates or reduces air exchange around dock leveler. It stops outside air mixing with the conditioned inside air of a building. The seals are constructed from abrasion and tear resistant vinyl. The seals are positioned in a manner to minimize air exchange through the working range of the dock leveler. They are the highest level dock leveler seal available. They can be installed on the dock leveller in conjunction with conventional rubber or brush weather seal. To maximize energy loss it is recommended to install rear weather seal in conjunction with the EnergyMax seal.

Features and Components

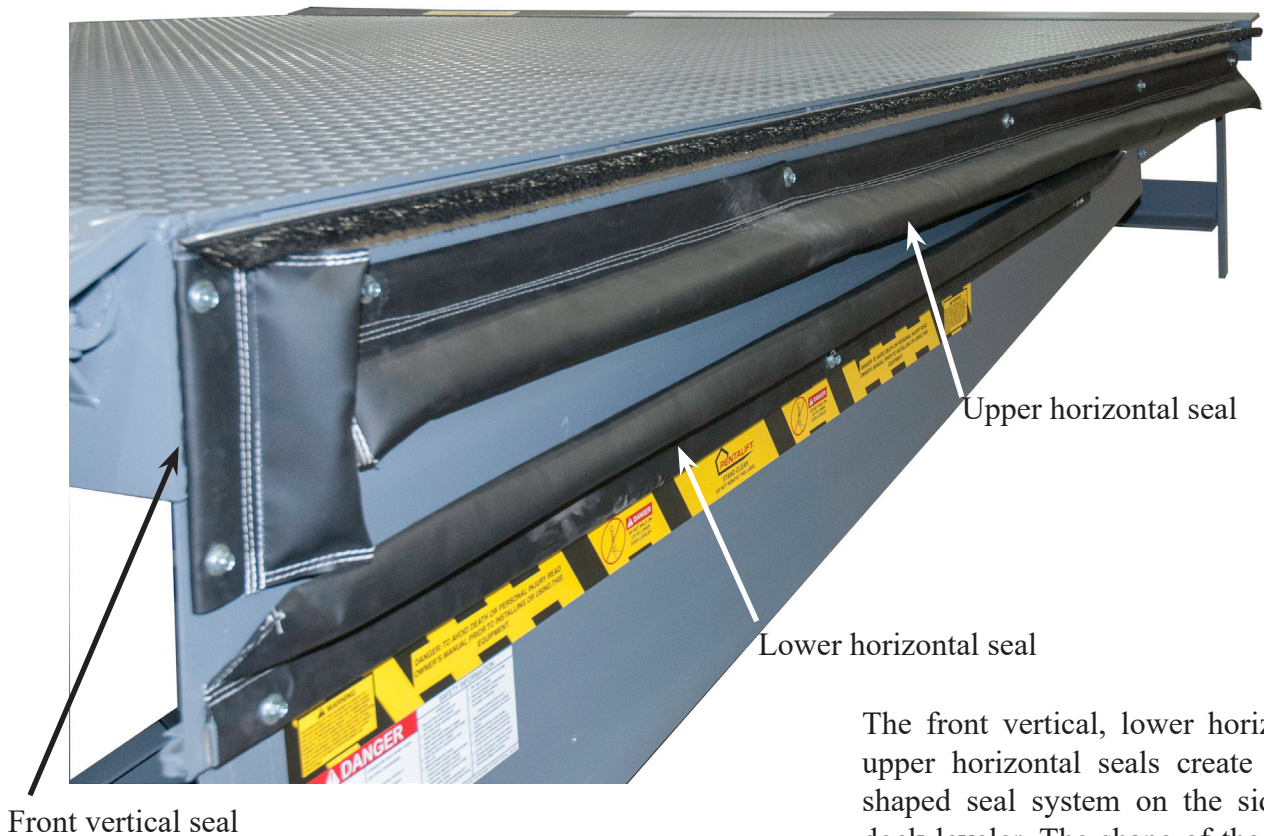

Note: Shown on installed on dock leveler.

The front vertical, lower horizontal and upper horizontal seals create a triangle shaped seal system on the sides of the dock leveler. The shape of the seals stop air exchange through the normal working range of the dock leveler.

Consult a Pentalift Sales Representative for additional information or equipment recommendations

Note: Some photos may reflect products with optional features. All Pentalift Equipment products are subject to design improvement through modification without notice.

PENTALIFT EQUIPMENT CORPORATION

21 Nicholas Beaver Road, Puslinch
Ontario, Canada, N0B 2J0

Phone (519) 763-3625 Fax (519) 763-2894
Phone (519) 763-3625 Fax (519) 763-2894

Website: www.pentalift.com

Email: dock@pentalift.com

Product Bulletin 0418D061
Printed in Canada