



# NL-SERIES NO-LOW LIFT TABLES

## PALLET JACK ACCESSIBLE HYDRAULIC SCISSOR LIFT TABLES

Pentalift NL-Series No-Low Lift Tables provide true floor-level access for pallet jacks and other mobile material handling equipment. The platform's bevelled profile design eliminates the need for recessed pit installation or long approach ramps, making it a practical solution for existing facilities, leased spaces, and flexible material handling applications.

### KEY BENEFITS

- ✓ True floor-level pallet jack access
- ✓ No recessed pit or long approach ramp required
- ✓ Bevelled platform profile for smooth loading
- ✓ Raises loads to ergonomic working heights
- ✓ Suited for existing or leased facilities

#### CAPACITIES

2,500 / 4,000 / 6,000 lb

#### VERTICAL TRAVEL

35 in. standard

#### PLATFORM SIZES

44 x 48 in. to 50 x 54 in.



Designed for pallet jack loading, ergonomic positioning, depalletizing, assembly, packaging, production and raised transfer applications.



# BUILT FOR FLOOR-LEVEL ACCESS WITHOUT THE NEED FOR A PIT



## WHY CHOOSE NL-SERIES?

- Direct pallet jack access without cutting a floor pit
- Practical alternative where pit installation is not preferred or possible
- Useful in existing facilities or leased industrial spaces
- Positions palletized loads at a comfortable working height



## TYPICAL APPLICATIONS

- Palletizing and depalletizing
- Machine and production line feeding
- Assembly workstations and order picking
- Packaging and shipping operations
- Loading or unloading to elevated work surfaces
- Raised-height drive-through loading applications




## ERGONOMIC BENEFITS

- Reduce operator fatigue and repetitive strain
- Improve operator access and workflow efficiency
- Increase consistency in material handling operations
- Support lean manufacturing and safer work practices



WAREHOUSE & MANUFACTURING USE

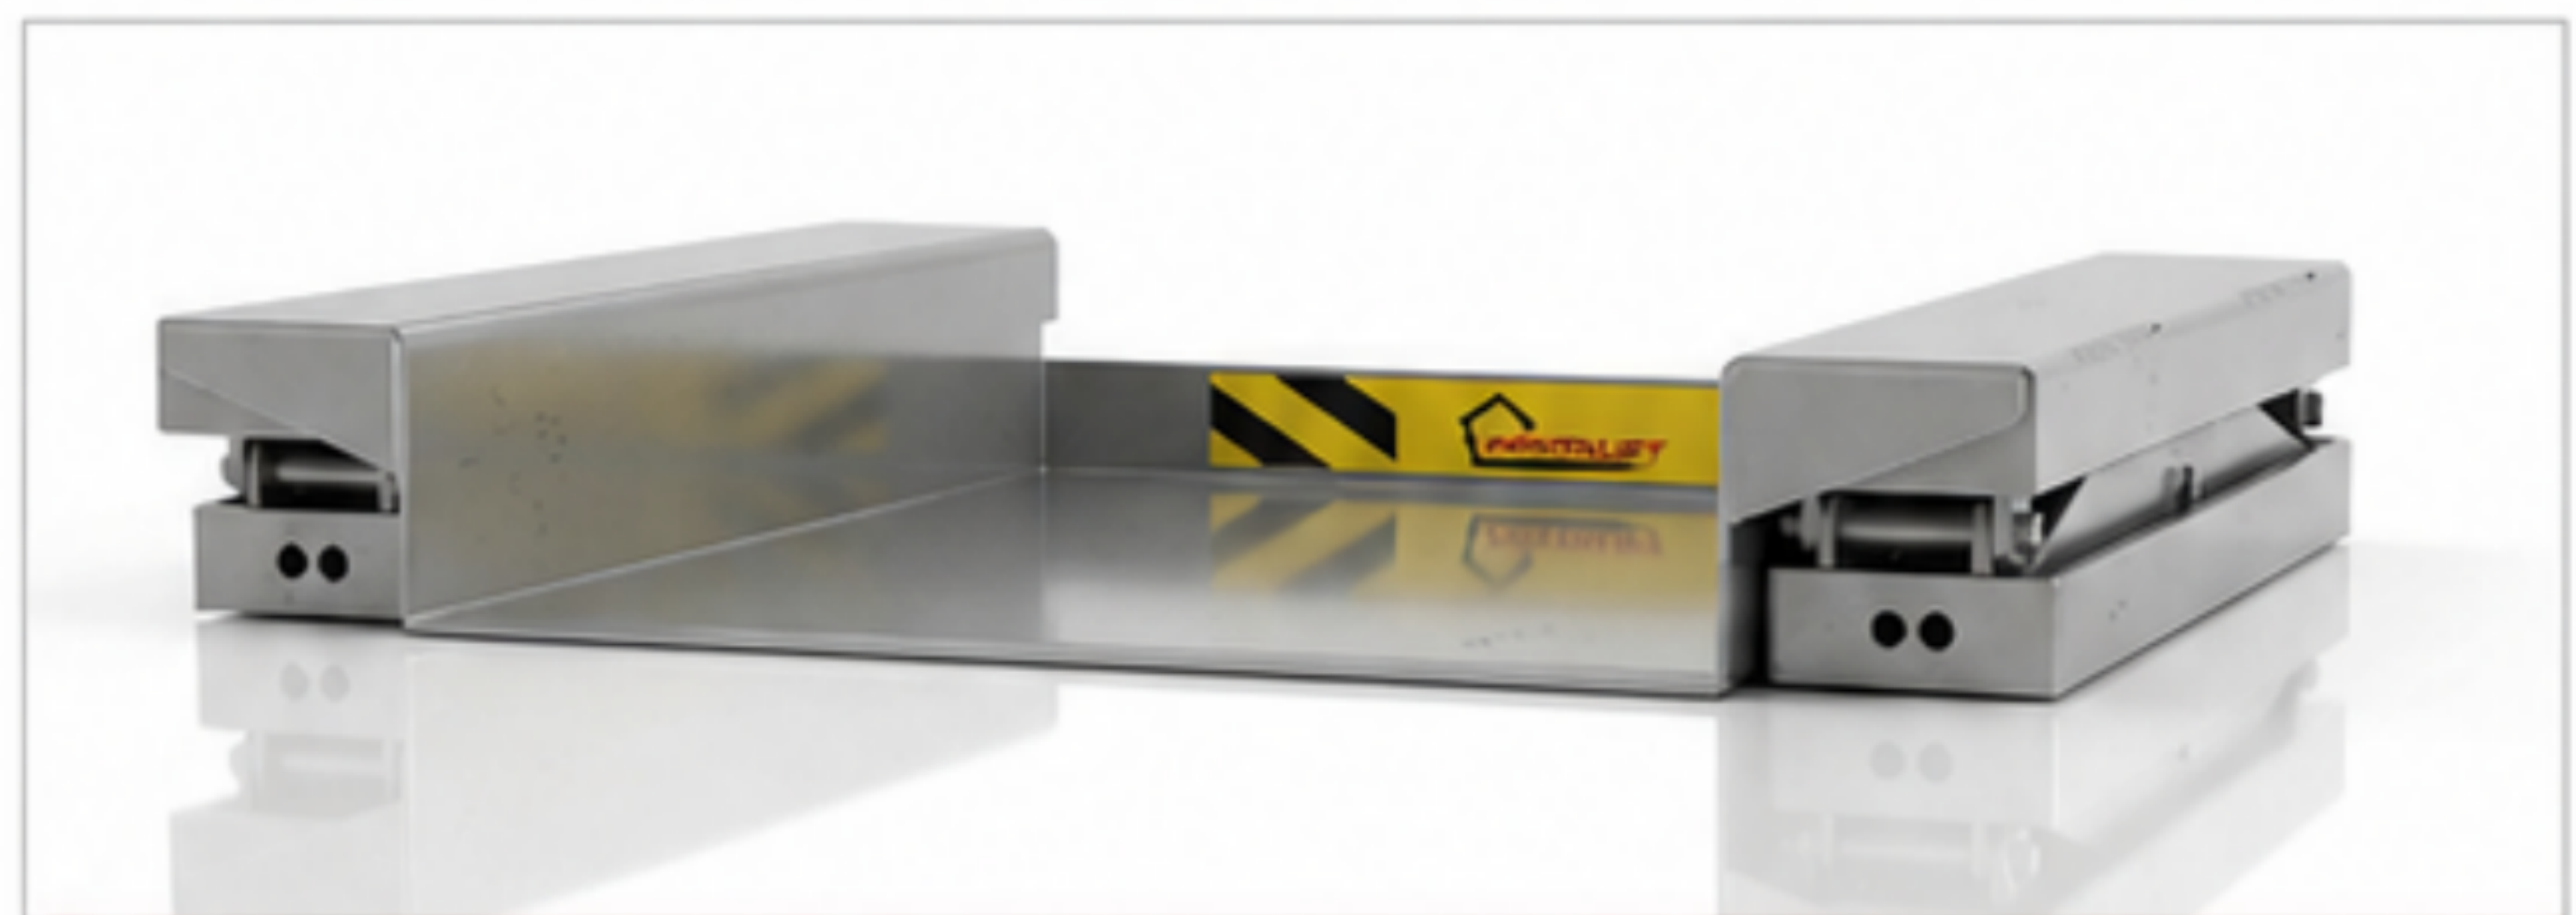

LOWERED POSITION

## SELECTION NOTES

Available in platform dimensions from 44 in. x 48 in. to 50 in. x 54 in. with standard 35 in. vertical travel. Capacities are 2,500 lb, 4,000 lb, and 6,000 lb. Optional drive-through configurations can support pallet jack access for raised transfer applications.

**Contact Pentalift to confirm pallet size, capacity, loading method and application requirements.**



21 Nicholas Beaver Road, Puslinch, ON N0B 2J0, Canada

[www.pentalift.com](http://www.pentalift.com)

P 519-763-3625 F 519-763-2894 E [lift@pentalift.com](mailto:lift@pentalift.com)