


Pentalift Model HFR32 Vehicle Restraint Safety System is designed to enhance loading dock safety by preventing unscheduled truck departure, trailer creep, and landing gear collapse. With its rugged construction and proven hydraulic operation, the HFR32 delivers superior performance in the most demanding environments. Engineered for reliability and minimal maintenance, this advanced restraint system provides clear communication to dock operators while ensuring secure trailer engagement. By integrating innovative safety features with a durable design, the HFR32 helps create a safer, more productive loading dock environment


Key Features

- **32,000 lb restraining capacity:** Engineered to provide exceptional reliability and strength.
- **Dual side-by-side hook design:** Increases holding strength and restraining capacity.
- **Reliable hydraulic operation:** Proven functionality in harsh environments, including extreme cold and wet conditions.
- **Flood-proof construction:** Standard design ensures reliable operation even after submersion.
- **Minimal maintenance:** Durable design for long-term operation.
- **Heavy-duty mounting plate:** Simplifies secure installation.
- **Operating range:** 10 1/2" to 28 1/2" facilitates no impact operation.

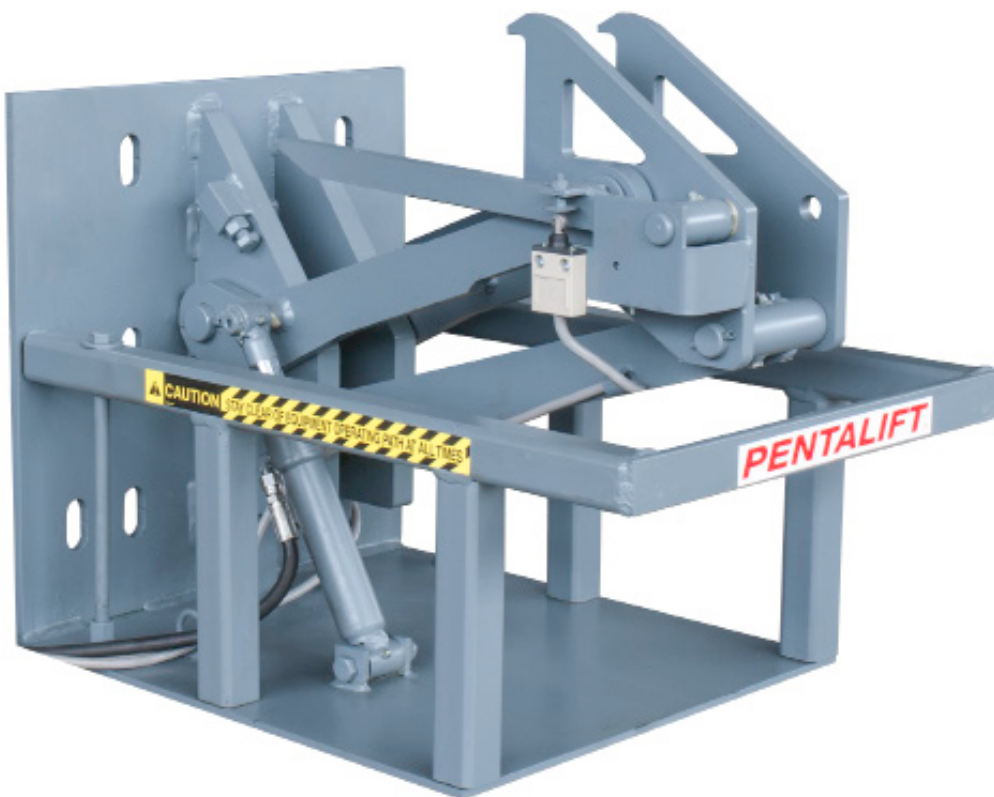

Why choose the HFR32?

- **Rugged structural guard:** Protects components from impact, with an open design to naturally clear debris.
- **Low profile:** 10 1/2" lowered height accommodates lower rear impact guards (RIGs).
- **Hydraulic reliability:** Ensures consistent performance without dependence on external motors or gas springs.
- **Cost savings:** Reduces risk of accidents, minimizing associated costs.
- **Signal Bar:** The signal bar makes contact with the rear impact guard (RIG) to communicate the restraint's engagement status clearly to operators.

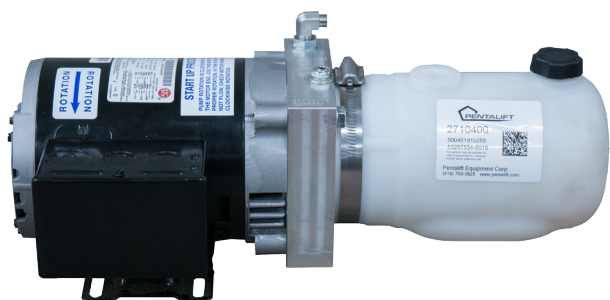

Hydraulic Power Unit:

- Compact hydraulic power unit can be installed on an interior wall or under the dock leveler.
- Internal wall mount accommodates an installation location that minimizes exposure to external elements, dirt and debris, vehicle and lift truck impacts.
- When purchased in conjunction with a Pentalift hydraulic dock leveler a common hydraulic power unit and control panel are provided resulting in reduced costs and easier installation.

